


SLIDE CONVEYOR DISHWASHER

High performance with close spray nozzle

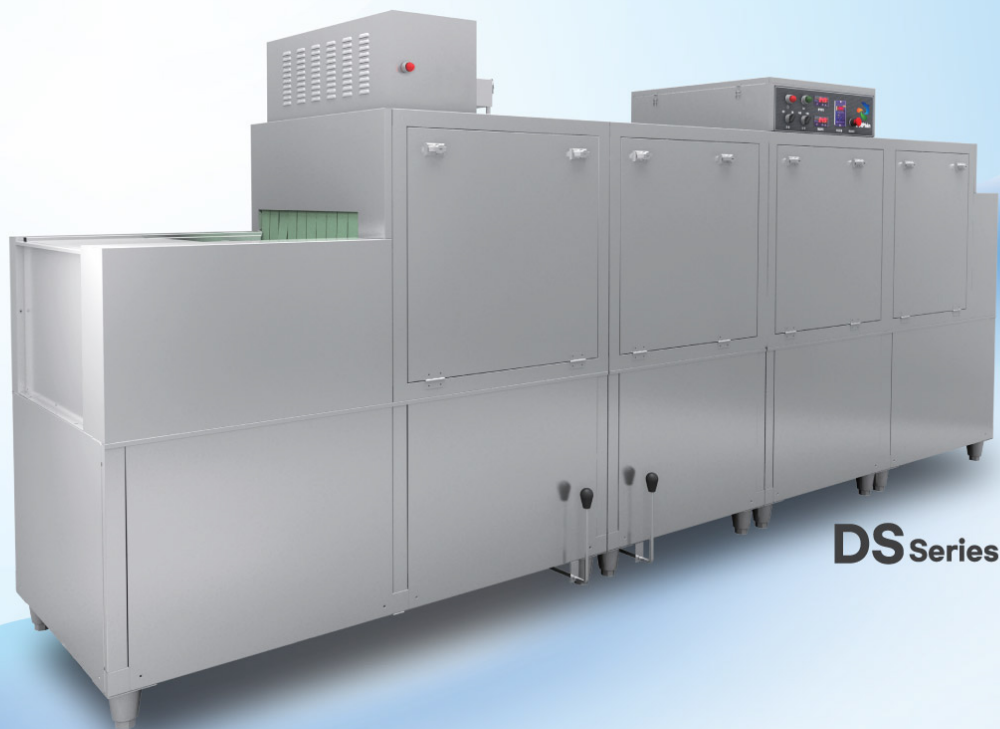

DS Series

Main features




Slide type



Flight type

VS

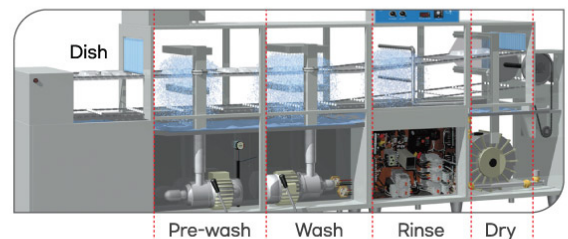

Dish

Pre-wash


Wash

Rinse

Dry



◦ Dimension

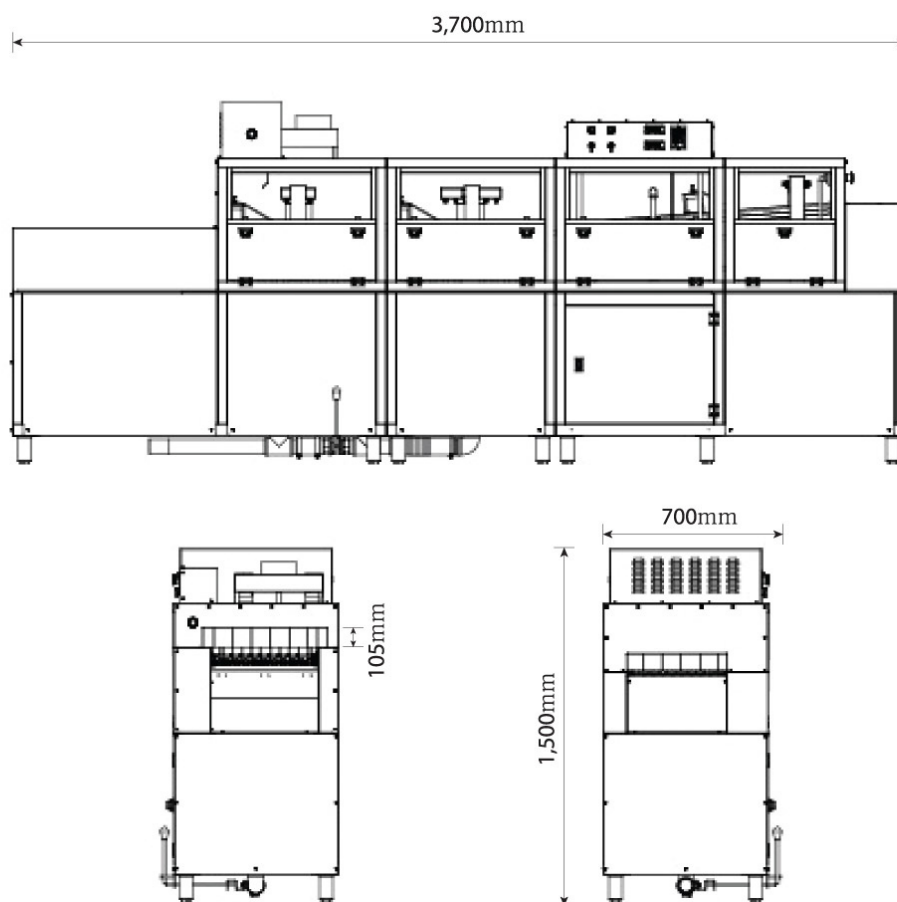

◦ features

- Size down and power up
- Hygienic wash efficiency by upper and lower close nozzle
- Vertical water blade to tray without blind spot by slide transportation of tray
- Whole wash cycle of pre-wash, wash, rinse and dry automatically proceeded
- Powerful dry with close hot air
- Additional wash tank applicable according to tray number
- Visible control panel convenient for temperature, speed setting
- Built-in dispenser of detergent and rinse aid (optional)

◦ Specification

SPEC		MODEL	DS-1G (Gas)	DS-2G (Gas)	DS-3G (Gas)
Dimension WxDxH(mm)			3,700×700×1,500	4,400×700×1,500	5,100×700×1,500
Power			380V 3PH		
Electric consumption			19.0kW	29.3kW	39.5kW
Pump Capacity (kW)	Pre-Wash Pump		1kW		
	Wash Pump		2.25kW	2.25kW×2	2.25kW×3
	Rinse Pump		0.13kW		
Motor (kW)	Driving Motor		0.18kW		
	Blower Motor		3.75kW		
	Exhaust Motor		0.12kW×2		
Heater Capacity (kW)	Wash Heater		4kW x 2	4kW×4	4kW×6
	Blower Heater		3kW		
Tank Capacity (L)	Pre-Wash Tank		83L		
	Wash Tank		120L	120L×2	120L×3
Water Supply	Consump.(L/hr)		720L	780L	840L
	Feed Pressure		2~8 Bar		
Max. loading height			105mm		
Recommended Wash Capacity	Tray(Dish)/Hour		750tray/Hr	1100tray/Hr	1450tray/Hr
	Conveyor Speed		0~10m/Min.		
Required Booster (Kcal/hr)			63,700Kcal		

Products are subject to be changed for improvement without notice